




bizhub C266/C226

KONICA MINOLTA

Option Diagram

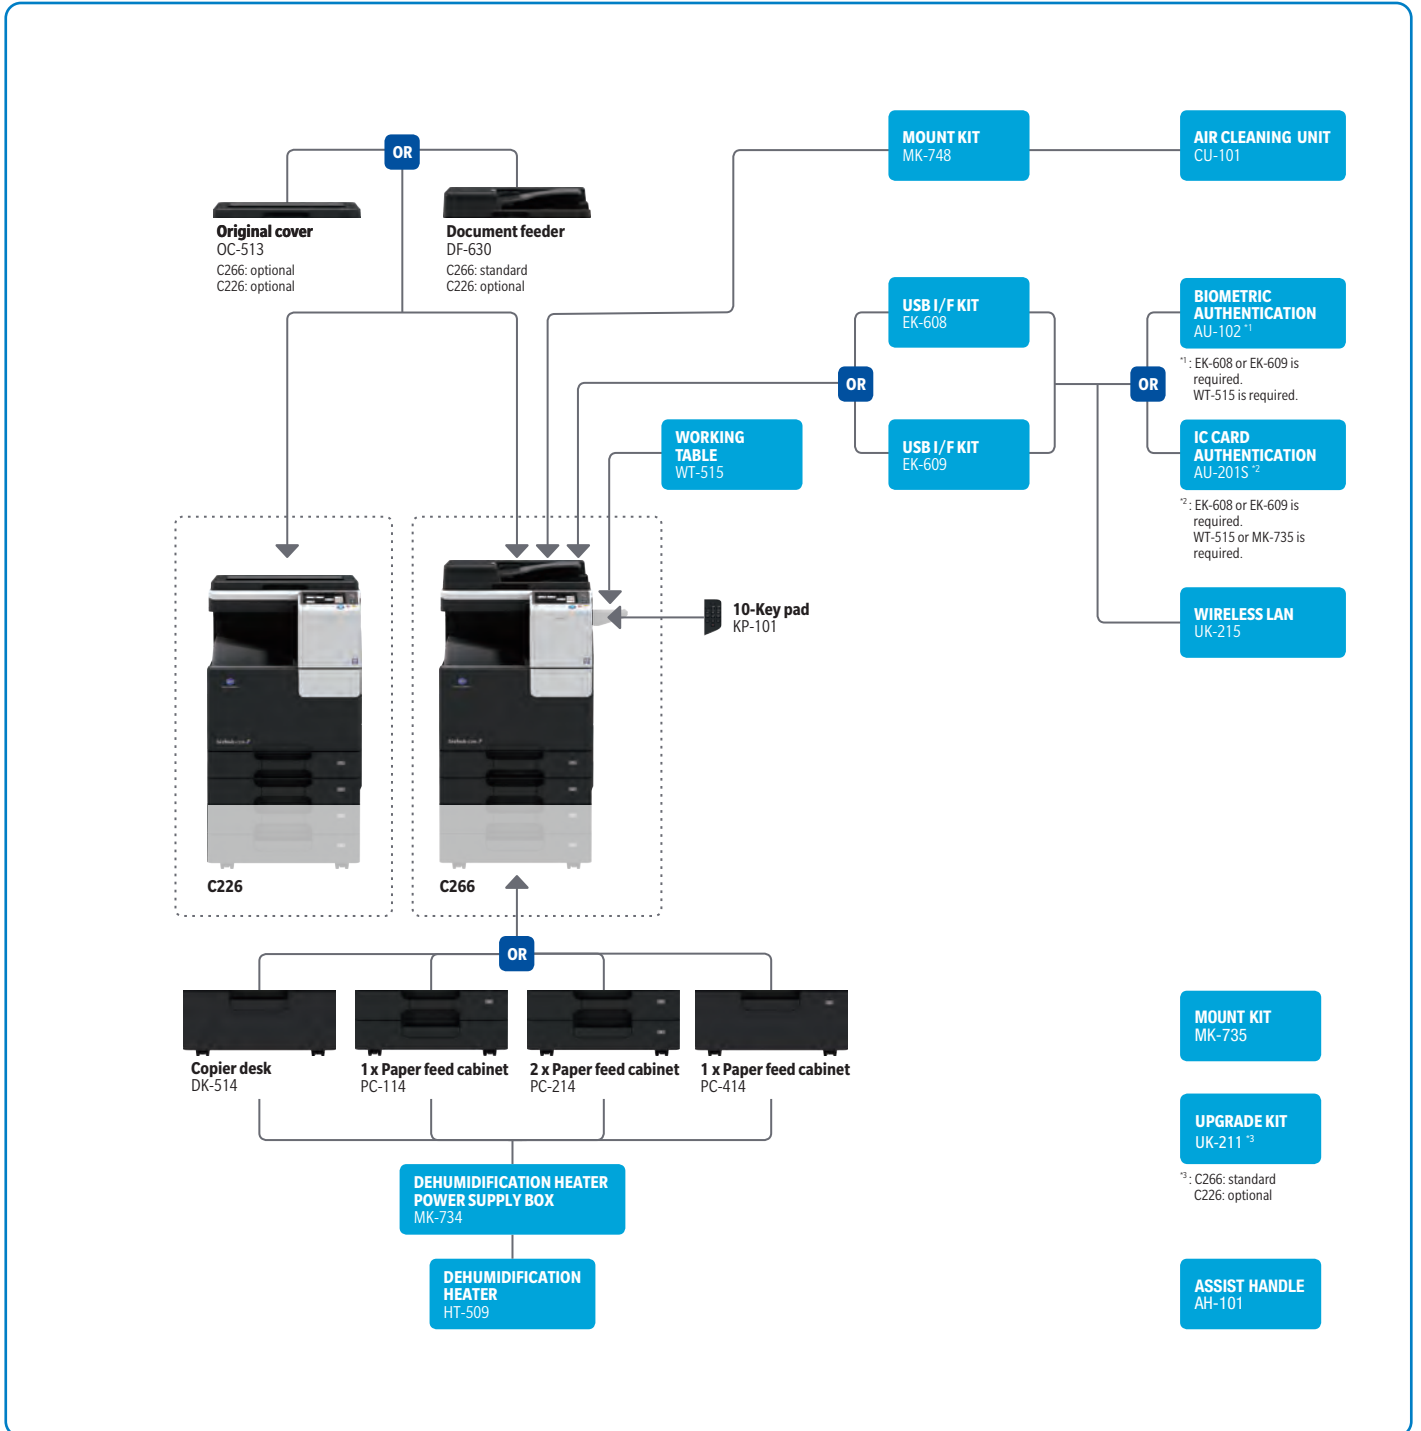

Finishing functionalities





MFP

bizhub C266/C226

COLOUR MID-VOLUME MULTIFUNCTION PRINTER

A3 multifunctional with 26/22 ppm b/w and colour. Standard Emperon™ print controller with PCL 6, PostScript 3, PDF 1.4, XPS, and OOXML support. Paper capacity of 500 + 500 sheets and 100-sheet manual bypass. Media from A5 to A3, 1.2 m banner and 60 – 256 gsm. 3 GB memory (C226: 1 GB memory) and Ethernet standard.

System Overview

System memory	C266: 3,072 MB (standard), C226: 1,024MB (standard)
Interface	10-BASE-T/100-BASE-TX/1,000-BASE-T Ethernet, USB 2.0 Wi-Fi 802.11a/b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4/IPv6), FTP, SMB, SMTP, WebDAV
Frame types	Ethernet 802.2, Ethernet 802.3, Ethernet II, Ethernet SNAP
Automatic document feeder DF-630 (optional)	Up to 70 originals, A5–A3, 35–128 gsm
Printable paper size	A5-A3, customised paper sizes (width: 90 - 270 mm, length: 139.7 mm - 431.8 mm), banner paper max. 1,200 x 297 mm
Printable paper weight	60-256 gsm
Paper input capacity	Standard: 1,150 sheets Max.: 3,600 sheets
Tray 1	500 sheets, B5–B4, 60–256 gsm
Tray 2	500 sheets, B5–A3, 60–256 gsm
Tray 3 PC-114 (optional)	1 x 500 sheets, B5-A3, 60-256 gsm
Tray 4 PC-214 (optional)	2 x 500 sheets, B5-A3, 60-256 gsm
Paper feed cabinet PC-414 (optional)	2,500 sheets, A4, 60-256 gsm
Bypass tray	100 sheets, A5–A3, custom sizes (width: 90-270mm, length: 139.7 mm - 1,200 mm), banner 210 x 1,200 mm, 127–210 gsm
Automatic duplexing	A5-A3, 50-128 gsm
Finishing modes (optional)	Group, sort, booklet
Power consumption	[220-240 V, 50/60 Hz] less than 1.58 kW (system) [120-127 V, 60 Hz] less than 1.5 kW (system) [110 V, 60 Hz] less than 1.5 kW (system)
System dimensions (W x D x H)	571 x 660 x 785.5 mm (excl. ADF and lower paper tray unit) 22.5 x 26.0 x 30.9 inch (excl. ADF and lower paper tray unit)
System weight ^{*1}	Approx. 71 kg (156.5 lb)

*1 Incl. Drum/Toner bottle

Components and Options

DK-514 Copier desk	Provides storage space for print media and other materials
DF-630 Document feeder	Reversing automatic document feeder, capacity 70 originals
OC-513 Original cover	Cover instead of ADF
CU-101 Air cleaning unit	Improving indoor air quality by reduced emissions
MK-748 Mount kit for CU-101	Installation kit for CU-101
HT-509 Dehumidification heater	Dehumidification heater for Paper feed cabinet, for PC-114/214/414, DK-514
MK-734 Dehumidification heater power supply box	Dehumidification heater power supply box (Cabinet heater), for PC-114/214/414, DK-514
KP-101 10-Key pad	10-key
AH-101 Assist handle	Assist handle
UK-211 Upgrade kit	2 GB memory extension for upgrades
UK-215 Wireless LAN kit	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB hub kit
EK-609 USB I/F kit	USB hub kit, Bluetooth LE
MK-735 Mount kit	Installation kit for ID card reader
AU-201S ID card authentication	IC card authentication unit
AU-102 Biometric authentication	Finger vein scanner
WT-515 Working table	Authentication device placement

Copier Specifications

Copying process	Electrostatic laser copy, tandem, intermediate
Toner system	Simitri® HD Polymerized Toner
Copy/print speed A4	C266: Up to 26 ppm, C226: Up to 22 ppm
Copy/print speed A3	C266: Up to 14 ppm, C226: Up to 14 ppm
1st copy out time	C266: 6.8 sec., C226: 8.4 sec.
Warm-up time ^{*2}	Approx. 20 sec.
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	A5-A3
Magnification	25-400% in 0.1% steps, auto-zooming

*2 Warm-up time may vary depending on the operating environment and usage

Printer Specifications

Print resolution	1,800 (equivalent) x 600 dpi
Page Description Language	PCL 6 (XL Version 3.0) Emulation, PCL 5e/c, PostScript 3 (3016) Emulation, XPS
Operating systems	Windows Vista (32/64), Windows 7 (32/64), Windows 8.1 (32/64), Windows 10 (32/64), Windows Server 2008 (32/64), Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Macintosh OS X 10.6 or later, Linux
Printer fonts	80 PCL, 137 PostScript 3 Emulation
Mobile printing	AirPrint (iOS), Mopria (Android), Google Cloud Print (optional), Wi-Fi Direct (optional), Konica Minolta Print Service (Android), PageScope Mobile (iOS, Android, Windows 10 Mobile)

Scanner Specifications

Scan speed	Up to 30 ipm
Resolution	Max.: 600 x 600 dpi
Scan modes	Scan to Email, Scan to PC (SMB), Scan to FTP, Scan to BOX (HDD), Scan to WebDAV, Scan to WSD (Web Service), Scan to DPWS (Device Profile for Web Service), Network TWAIN scan
File formats	JPEG, TIFF, PDF, compact PDF, XPS, compact XPS, PPTX
Destinations	1,300 (single + group), LDAP support



- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities vary depending on operating systems, applications and network protocols as well as network and system configurations.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

KONICA MINOLTA, INC.

JP Tower, 2-7-2 Marunouchi, Chiyoda-ku,
Tokyo 100-7014, Japan
<http://www.konicaminolta.com>